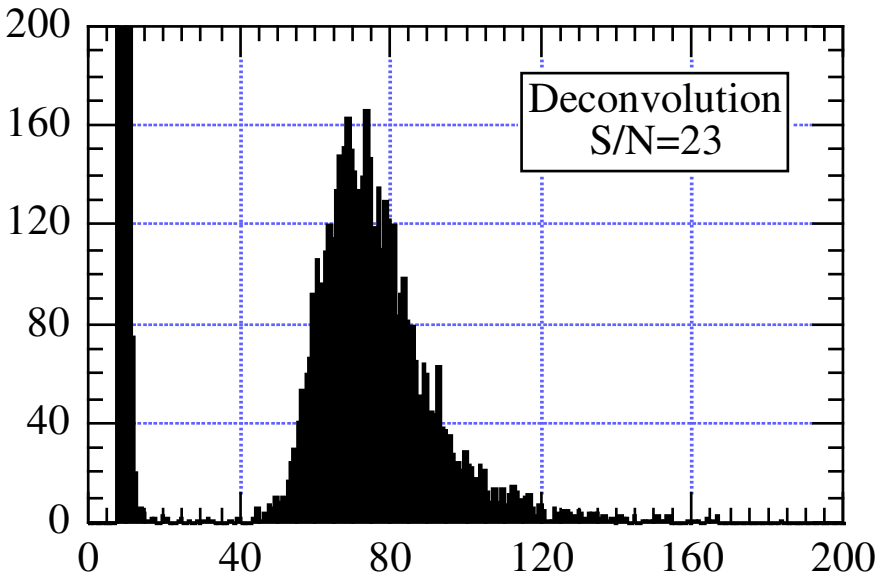

Figure 5. APV25 signal to noise measured in deconvolution mode with a 5 cm, 50 μm microstrip detector using a ^{90}Sr β-source.

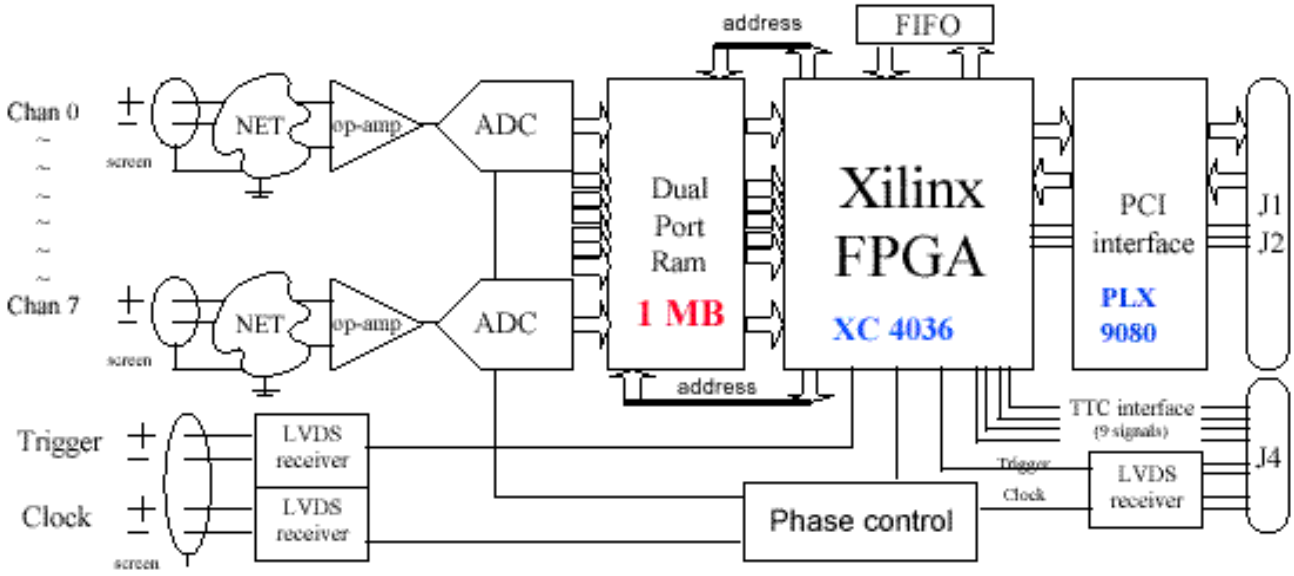

Figure 6. Block diagram of the CMS PCI format Front End Driver module.